


威 佳

威佳电气，
每位工程师的专业选择！

UE-iCooling-UF3325

Product Introduction

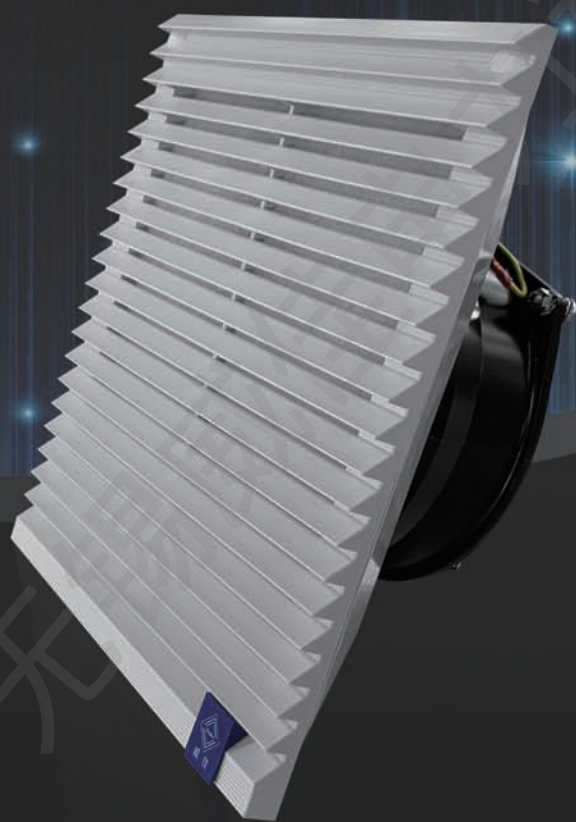

使用产品前请仔细阅读本使用说明，并请妥善保管

1 产品概述

Product Description

Vaule+ 过滤器

为了通过对流进行通风，可在机柜的上面或下面部分安装一个过滤器风扇。

颜色：外壳 RAL7035 色。

供货范围：完整的安装单元，包含过滤垫、风机。

In order to ventilate by convection, a filter fan can be installed on the upper or lower part of the cabinet.

Color: Shell RAL7035.

Supply: Complete installation unit, including filter pad and fan.

1.1 产品参数 Product Parameters


额定工作电压 Rated Working Voltage V, ~, Hz	230, 1 ~, 50
气流量自由送风量 Free Air Flow	325m ³ /h
带过滤棉风量 Air Volume With Filter Cotton	240m ³ /h
消耗功率 Power Consumption	45W
阻燃等级 Flame Retardant Grade	V0
防护等级 Protection Level	IP54
外壳材质 Shell Material	ASA+PC
宽度 (B) Width	255mm
高度 (H) Height	255mm
深度 (T1) Depth	12.5mm
最大安装深度 (T2) Maximum Installation Depth	105mm

UE-iCooling-UF3325

标准安装开口尺寸 (B*H) Standard Installation Opening Size	224*224mm
风扇 Fan	交流轴流风机 AC Axial Flow Fan
工作温度范围 Operating Temperature Range	-25°C /+50°C
贮存温度范围 Storage Temperature Range	-35°C /+60°C
噪音等级 Noise Level	49 dB(A)
滤棉材质 Filter Cotton Material	聚烯烃纤维 Polyolefin Fiber
过滤等级 Filtration Grade	G3

2 原理图

Schematic Diagram


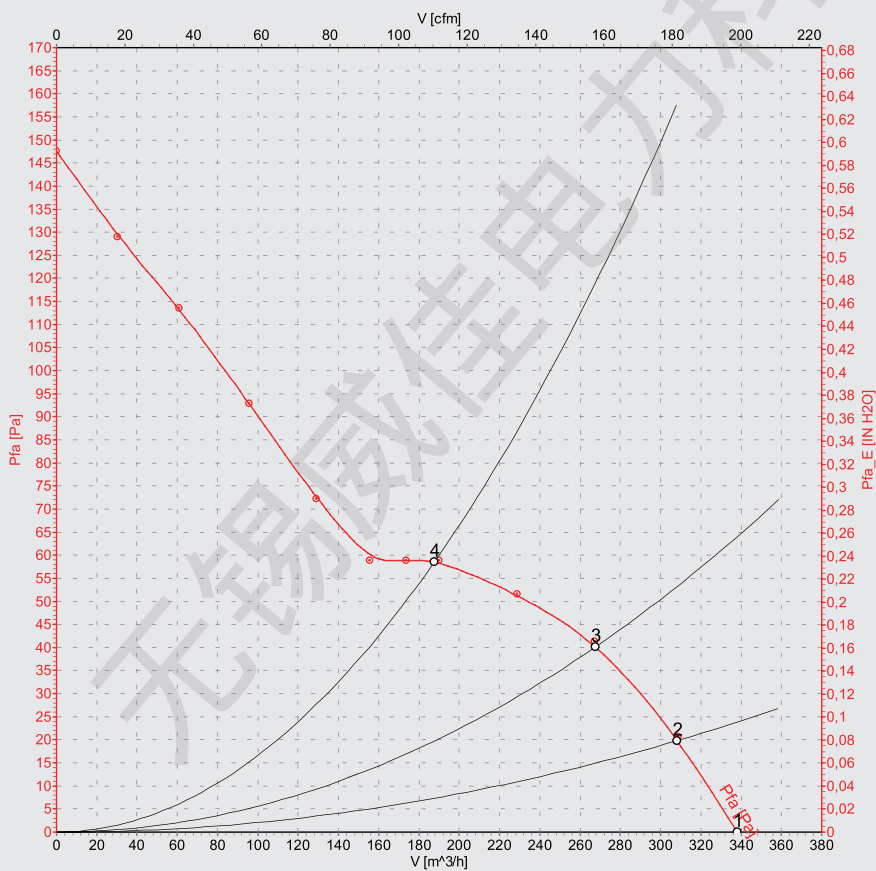


风机的风量与风压曲线图



Air volume and pressure curve of fan

UE-iCooling-UF3325

2D 图纸 2D Drawing

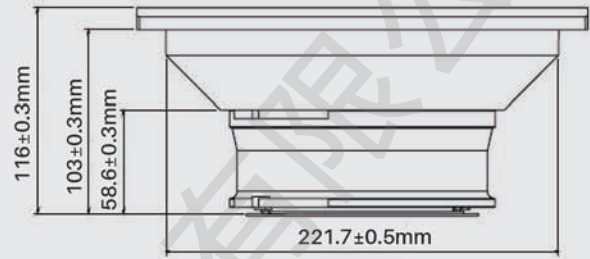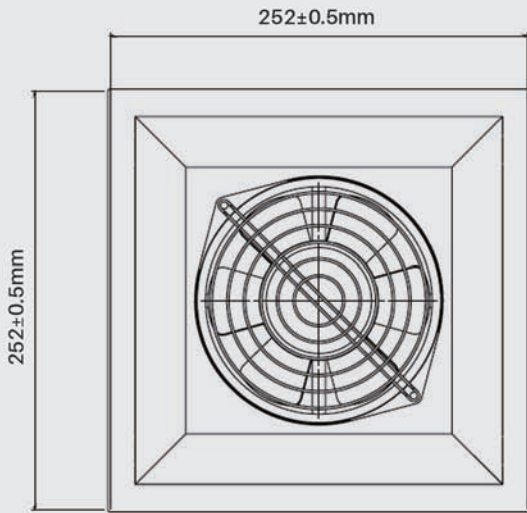

安装图 Installation Diagram

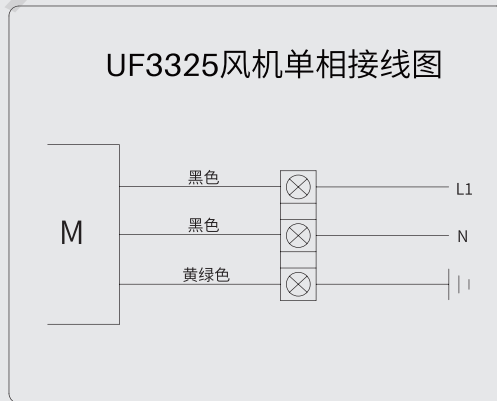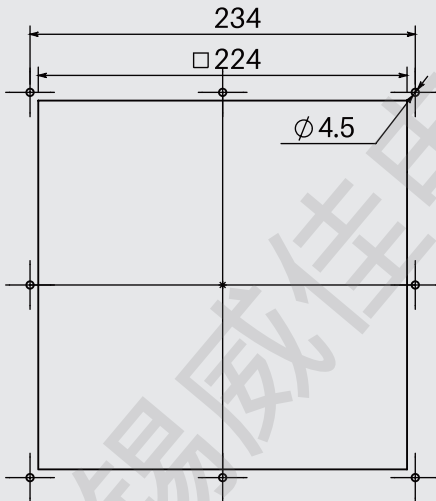

UE-iCooling-UF3325

Product Introduction

Vaule Plus,
Professional Choice of Each Engineer!

无锡威佳电力科技有限公司

Wuxi Vaule Plus Electric Power Technology Co., Ltd
South side of shuofanlihe road and west side of sun'an highway, Xinwu District, Wuxi City
Email sale@gb-value.com

