


威 佳


威佳电气,
每位工程师的专业选择!

UE-iPart-Trunking

Product Introduction

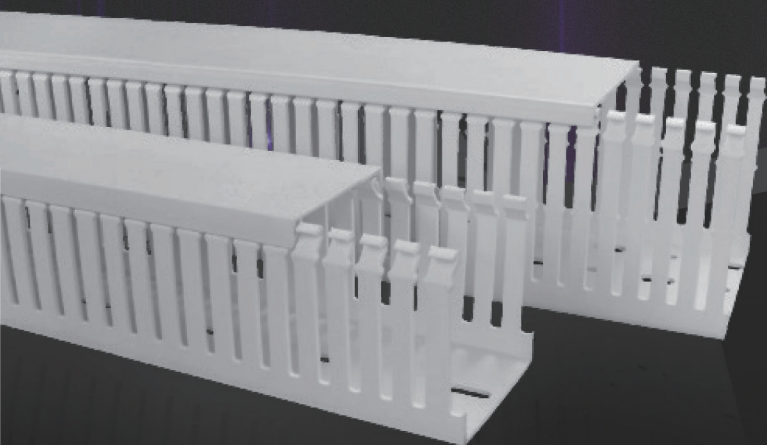

使用产品前请仔细阅读本使用说明，并请妥善保管

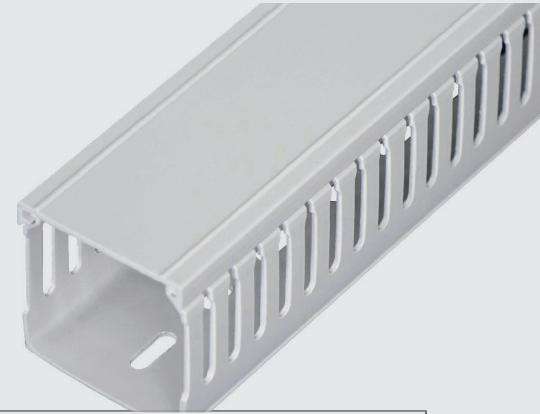


1 国标环保阻燃线槽

GB Environmental Protection Flame Retardant Trunking

材质 Material	采用环保硬质 PVC, 通过 ROHS 认证, 不含铅等有害物质, 低烟、环保。 Manufactured with high quality rigid PVC, ROHS compliant, low smoke.
防火等级 Flammability Rating	UL94V-0 阻燃等级, 良好自熄性, 绝缘特性佳。 UL94 Flammability Rating of V-0, inflaming retarding material with good self extinguishing ability.
产品构造 Construction	- 槽体与槽盖配合而成, 组合容易, 不脱落, 接合面平滑不伤手。 Consist of base and cover, Easy and firm snap-on assembly, smooth joining for a better finish. - 槽身两侧出线孔对称, 可确保截面光洁、整齐, 不擦损电线。 With aligned slot, Smooth corners and edges will not damage or disfigure wires. - 齐全的尺寸及多样化的侧孔、安装孔设计, 方便选型, 易于配线。 All sides and versatile mounting holes, easy to install and disassembly. - 槽盖上独特的标记线设计, 可使配线标识明确, 快捷美观。 Special mark line design on the cover can allow a quick tag of relevant components.
颜色种类 Color	RAL7035 (白色、蓝色、黑色等可特殊定制) RAL7035 (White, Blue and Black colors are available)
工作温度 Temperature	-20°C ~65°C

开孔细齿型 Fine Tooth Type with Opening


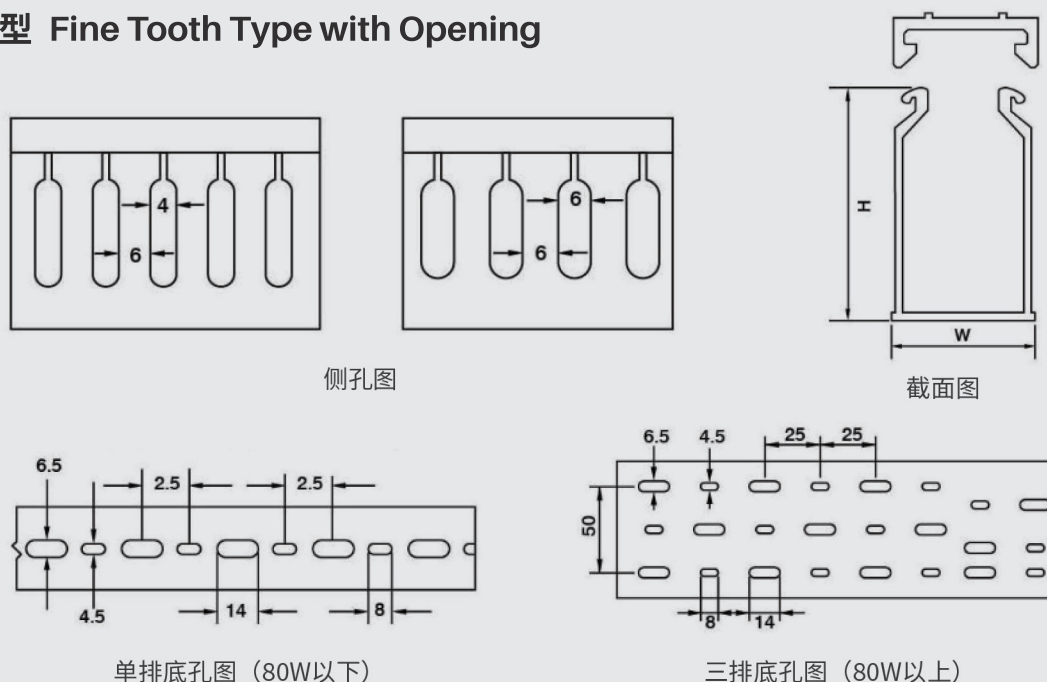


型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VS-VD20 15	H20*W15	4	6	5-12pcs	2m	200	2122.11101
VS-VD25 25	H25*W25	4	6	10-25pcs	2m	100	2122.11102
VS-VD30 20	H30*W20	4	6	15-25pcs	2m	100	2122.11103
VS-VD30 25	H30*W25	4	6	15-25pcs	2m	100	2122.11104
VS-VD35 35	H35*W35	4	6	30-50pcs	2m	100	2122.11105
VS-VD40 25	H40*W25	4	6	20-25pcs	2m	100	2122.11201
VS-VD40 40	H40*W40	4	6	60-70pcs	2m	100	2122.11202
VS-VD40 60	H40*W60	4	6	100-115pcs	2m	64	2122.11203
VS-VD50 25	H50*W25	4	6	20-25pcs	2m	100	2122.11301
VS-VD50 35	H50*W35	4	6	40-60pcs	2m	100	2122.11302
VS-VD50 45	H50*W45	4	6	70-80pcs	2m	80	2122.11303
VS-VD50 50	H50*W50	4	6	80-90pcs	2m	80	2122.11304
VS-VD50 55	H50*W55	4	6	90-100pcs	2m	64	2122.11305
VS-VD50 60	H50*W60	4	6	100-120pcs	2m	64	2122.11306
VS-VD50 80	H50*W80	4	6	160-180pcs	2m	48	2122.11307

UE-iPart-Trunking

型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VS-VD60 25	H60*W25	4	6	40-45pcs	2m	80	2122.11401
VS-VD60 40	H60*W40	4	6	100-115pcs	2m	64	2122.11402
VS-VD60 50	H60*W50	4	6	100-120pcs	2m	64	2122.11403
VS-VD60 55	H60*W55	4	6	115-125pcs	2m	48	2122.11404
VS-VD60 60	H60*W60	4	6	120-135pcs	2m	48	2122.11405
VS-VD60 80	H60*W80	4	6	180-210pcs	2m	36	2122.11406
VS-VD65 33	H65*W33	4	6	40-75pcs	2m	80	2122.11501
VS-VD65 45	H65*W45	4	6	110-120pcs	2m	80	2122.11502
VS-VD65 65	H65*W65	4	6	180-200pcs	2m	48	2122.11503
VS-VD80 25	H80*W25	4	6	100-120pcs	2m	60	2122.11601
VS-VD80 35	H80*W35	4	6	110-130pcs	2m	60	2122.11602
VS-VD80 40	H80*W40	4	6	140-160pcs	2m	48	2122.11603
VS-VD80 45	H80*W45	4	6	140-165pcs	2m	48	2122.11604
VS-VD80 50	H80*W50	4	6	160-180pcs	2m	48	2122.11605
VS-VD80 60	H80*W60	4	6	180-210pcs	2m	36	2122.11606
VS-VD80 80	H80*W80	4	6	240-290pcs	2m	36	2122.11607
VS-VD80 100	H80*W100	4	6	260-350pcs	2m	24	2122.11608
VS-VD80 120	H80*W120	4	6	280-380pcs	2m	24	2122.11609
VS-VD100 25	H100*W25	6	6	120-150pcs	2m	48	2122.11701
VS-VD100 33	H100*W33	6	6	130-165pcs	2m	48	2122.11702
VS-VD100 35	H100*W35	6	6	130-165pcs	2m	48	2122.11703
VS-VD100 40	H100*W40	6	6	130-175pcs	2m	48	2122.11704
VS-VD100 50	H100*W50	6	6	220-250pcs	2m	48	2122.11705
VS-VD100 60	H100*W60	6	6	240-290pcs	2m	36	2122.11706
VS-VD100 80	H100*W80	6	6	260-350pcs	2m	24	2122.11707
VS-VD100 100	H100*W100	6	6	300-400pcs	2m	24	2122.11708
VS-VD100 120	H100*W120	6	6	380-480pcs	2m	24	2122.11709
VS-VD100 140	H100*W140	6	6	430-620pcs	2m	24	2122.11710

开孔粗齿型 Tooth Profile of Opening

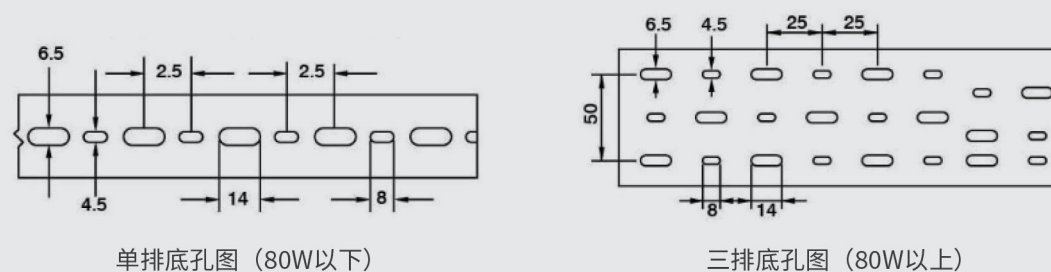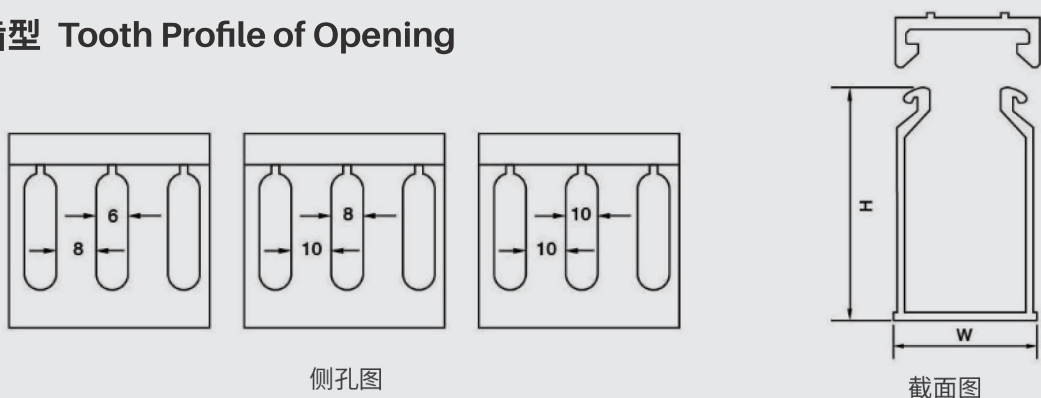

型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m ²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VS-UD40 25	H40*W25	6	8	20-25pcs	2m	100	2122.12101
VS-UD40 40	H40*W40	6	8	60-70pcs	2m	100	2122.12102
VS-UD40 60	H40*W60	6	8	100-115pcs	2m	64	2122.12103
VS-UD45 33	H45*W33	6	8	40-55pcs	2m	100	2122.12201
VS-UD45 45	H45*W45	6	8	60-70pcs	2m	80	2122.12202
VS-UD50 25	H50*W25	6	8	20-25pcs	2m	100	2122.12301
VS-UD50 35	H50*W35	6	8	40-60pcs	2m	100	2122.12302
VS-UD50 45	H50*W45	6	8	70-80pcs	2m	80	2122.12303
VS-UD50 50	H50*W50	6	8	80-90pcs	2m	80	2122.12304
VS-UD50 55	H50*W55	6	8	90-100pcs	2m	48	2122.12305
VS-UD50 60	H50*W60	6	8	100-120pcs	2m	48	2122.12306
VS-UD50 80	H50*W80	6	8	160-180pcs	2m	48	2122.12307

UE-iPart-Trunking

型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m ²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VS-UD60 25	H60*W25	8	10	40-45pcs	2m	80	2122.12401
VS-UD60 40	H60*W40	8	10	100-115pcs	2m	64	2122.12402
VS-UD60 50	H60*W50	8	10	100-120pcs	2m	48	2122.12403
VS-UD60 55	H60*W55	8	10	115-125pcs	2m	48	2122.12404
VS-UD60 60	H60*W60	8	10	120-135pcs	2m	48	2122.12405
VS-UD60 80	H60*W80	8	10	180-210pcs	2m	36	2122.12406
VS-UD65 33	H65*W33	8	10	40-75pcs	2m	80	2122.12501
VS-UD65 45	H65*W45	8	10	110-120pcs	2m	80	2122.12502
VS-UD65 65	H65*W65	8	10	180-200pcs	2m	48	2122.12503
VS-UD80 25	H80*W25	8	10	100-120pcs	2m	60	2122.12601
VS-UD80 35	H80*W35	8	10	110-130pcs	2m	60	2122.12602
VS-UD80 40	H80*W40	8	10	140-160pcs	2m	48	2122.12603
VS-UD80 45	H80*W45	8	10	140-165pcs	2m	48	2122.12604
VS-UD80 50	H80*W50	8	10	160-180pcs	2m	48	2122.12605
VS-UD80 60	H80*W60	8	10	180-210pcs	2m	36	2122.12606
VS-UD80 80	H80*W80	8	10	240-290pcs	2m	36	2122.12607
VS-UD80 100	H80*W100	8	10	260-350pcs	2m	24	2122.12608
VS-UD80 120	H80*W120	8	10	280-380pcs	2m	24	2122.12609
VS-UD100 25	H100*W25	10	10	120-150pcs	2m	48	2122.12701
VS-UD100 33	H100*W33	10	10	130-165pcs	2m	48	2122.12702
VS-UD100 35	H100*W35	10	10	130-165pcs	2m	48	2122.12703
VS-UD100 40	H100*W40	10	10	130-175pcs	2m	48	2122.12704
VS-UD100 50	H100*W50	10	10	220-250pcs	2m	48	2122.12705
VS-UD100 60	H100*W60	10	10	240-290pcs	2m	36	2122.12706
VS-UD100 80	H100*W80	10	10	260-350pcs	2m	24	2122.12707
VS-UD100 100	H100*W100	10	10	300-400pcs	2m	24	2122.12708
VS-UD100 120	H100*W120	10	10	380-480pcs	2m	24	2122.12709
VS-UD100 140	H100*W140	10	10	430-620pcs	2m	16	2122.12710
VS-UD130 100	H130*W100	10	10	420-600pcs	2m	16	2122.12901
VS-UD140 35	H140*W35	10	10	120-165pcs	2m	24	2122.12902
VS-UD150 100	H150*W100	10	10	450-650pcs	2m	16	2122.12903




2 低烟无卤线槽（普通款）

Low Smoke Halogen-free Trunking (Ordinary)

材质 Material	聚碳酸酯+工程塑料，低烟无卤，环保绝缘，高耐温性能，阻燃安全。 PC+ABS, halogel free, Low smoke, RoHs compliant, Insulating material, Electric safety, Fire safety.
防火等级 Flammability Rating	UL94V-0 阻燃等级，良好自熄性，绝缘特性佳。 UL94 Flammability Rating of V-0, inflaming retarding material with good self extinguishing ability.
产品构造 Construction	- 槽体与槽盖配合而成，组合容易，不脱落，接合面平滑不伤手。 Consist of base and cover, Easy and firm snap-on assembly, smooth joining for a better finish. - 槽身两侧出线孔对称，可确保截面光洁、整齐，不擦损电线。 With aligned slot, Smooth corners and edges will not damage or disfigure wires. - 齐全的尺寸及多样化的侧孔、安装孔设计，方便选型，易于配线。 All sides and versatile mounting holes, easy to install and disassembly. - 槽盖上独特的标记线设计，可使配线标识明确，快捷美观。 Special mark line design on the cover can allow a quick tag of relevant components.
颜色种类 Color	RAL7035（白色、蓝色、黑色等可特殊定制） RAL7035 (White, Blue and Black colors are available)
工作温度 Temperature	-40°C ~90°C

开孔细齿型 Fine Tooth Type with Opening

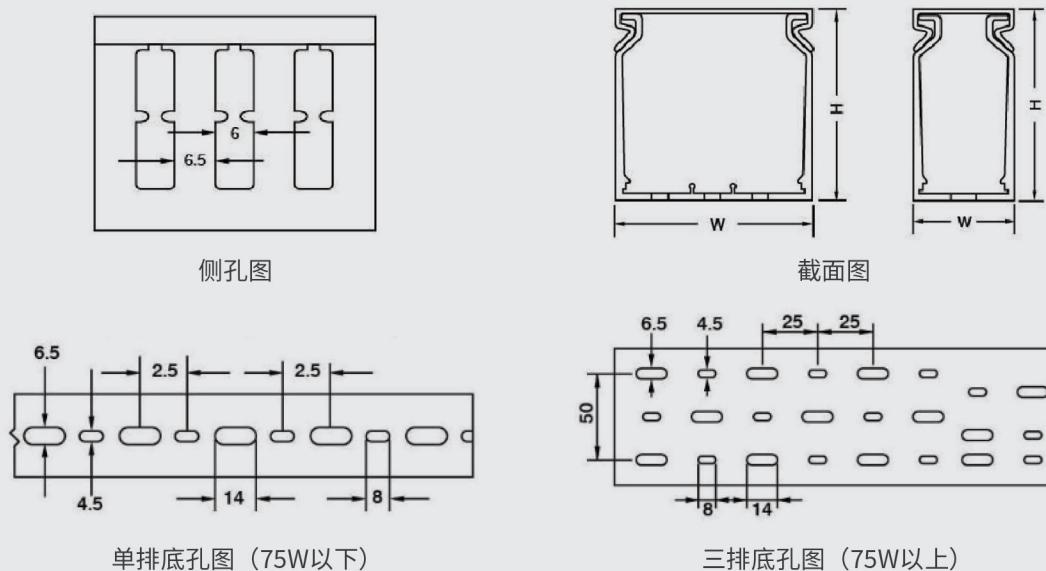


型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VL-VD40 25	H40*W25	4	6	20-25pcs	2m	100	2122.21101
VL-VD40 40	H40*W40	4	6	60-70pcs	2m	100	2122.21102
VL-VD40 60	H40*W60	4	6	100-115pcs	2m	64	2122.21103
VL-VD40 80	H40*W80	4	6	120-135pcs	2m	48	2122.21104
VL-VD50 35	H50*W35	4	6	40-60pcs	2m	100	2122.21201
VL-VD50 50	H50*W50	4	6	80-90pcs	2m	80	2122.21202
VL-VD50 80	H50*W80	4	6	160-180pcs	2m	48	2122.21203
VL-VD50 100	H50*W100	4	6	220-250pcs	2m	48	2122.21204
VL-VD60 25	H60*W25	4	6	40-45pcs	2m	80	2122.21301
VL-VD60 40	H60*W40	4	6	100-115pcs	2m	64	2122.21302
VL-VD60 60	H60*W60	4	6	120-135pcs	2m	48	2122.21303
VL-VD60 80	H60*W80	4	6	180-210pcs	2m	36	2122.21304

UE-iPart-Trunking

型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VL-VD80 35	H80*W35	4	6	110-130pcs	2m	60	2122.21401
VL-VD80 40	H80*W40	4	6	140-160pcs	2m	48	2122.21402
VL-VD80 50	H80*W50	4	6	160-180pcs	2m	48	2122.21403
VL-VD80 60	H80*W60	4	6	180-210pcs	2m	36	2122.21404
VL-VD80 80	H80*W80	4	6	240-290pcs	2m	36	2122.21405
VL-VD80 100	H80*W100	4	6	260-350pcs	2m	24	2122.21406
VL-VD80 120	H80*W120	4	6	280-380pcs	2m	24	2122.21407
VL-VD100 40	H100*W40	4	6	130-175pcs	2m	48	2122.21501
VL-VD100 50	H100*W50	4	6	220-250pcs	2m	48	2122.21502
VL-VD100 60	H100*W60	4	6	240-290pcs	2m	36	2122.21503
VL-VD100 75	H100*W75	4	6	260-350pcs	2m	24	2122.21504
VL-VD100 100	H100*W100	4	6	300-400pcs	2m	24	2122.21505

开孔粗齿型 Rough Tooth Profile of Opening

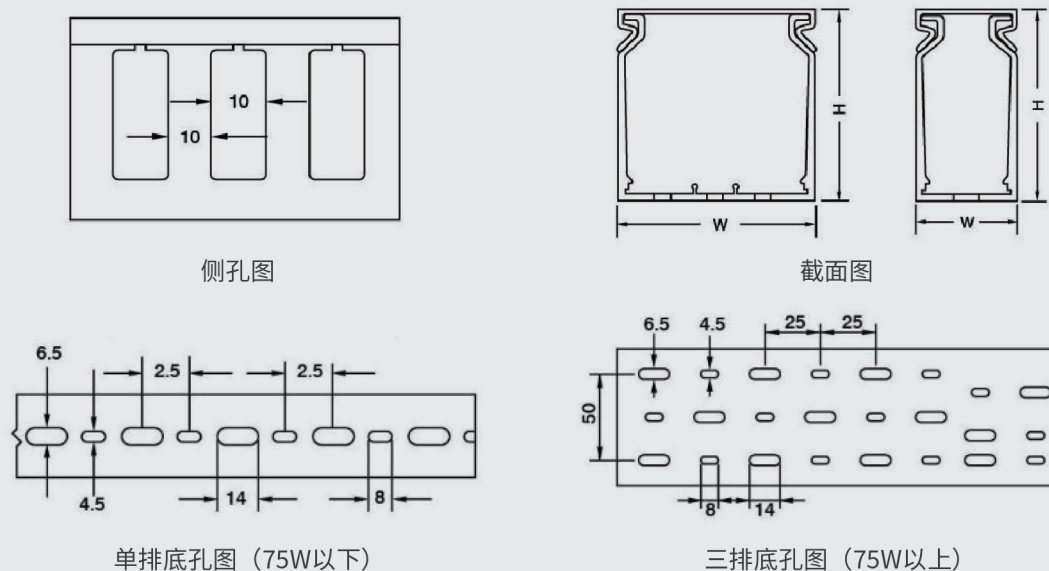

型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VL-UD35 35	H35*W35	10	8	20-25pcs	2m	100	2122.22101
VL-UD50 35	H50*W35	10	8	40-60pcs	2m	100	2122.22201
VL-UD50 50	H50*W50	10	8	80-90pcs	2m	80	2122.22202
VL-UD50 80	H50*W80	10	8	160-180pcs	2m	48	2122.22203
VL-UD50 100	H50*W100	10	8	220-250pcs	2m	48	2122.22204
VL-UD80 35	H80*W35	10	8	110-130pcs	2m	60	2122.22301
VL-UD80 40	H80*W40	10	8	140-160pcs	2m	48	2122.22302
VL-UD80 50	H80*W50	10	8	160-180pcs	2m	48	2122.22303
VL-UD80 60	H80*W60	10	8	180-210pcs	2m	36	2122.22304
VL-UD80 80	H80*W80	10	8	240-290pcs	2m	36	2122.22305
VL-UD80 100	H80*W100	10	8	260-350pcs	2m	24	2122.22306
VL-UD80 120	H80*W120	10	8	280-380pcs	2m	24	2122.22307




3 低烟无卤线槽（加强款）

Low Smoke Halogen-free Trunking (Enhanced)


材质 Material	聚碳酸酯+工程塑料，低烟无卤，环保绝缘，高耐温性能，阻燃安全。 PC+ABS, halogel free, Low smoke, RoHs compliant, Insulating material, Electric safety, Fire safety.
防火等级 Flammability Rating	UL94V-0 阻燃等级，良好自熄性，绝缘特性佳。 UL94 Flammability Rating of V-0, inflaming retarding material with good self extinguishing ability.
产品构造 Construction	- 槽体侧面壁厚，由上至下逐渐增加，可提升侧壁强度，可靠性佳。 Sides get thick, enhanced gradually from top to bottom, and improving sides' strength and reliability. - 盖板与槽身结合处采用双层结构，即易于拆卸又不会脱落。 Double layers are applied to the joint of cover and sides, making it easier to disassemble but more secured. - 底部直角部分做易折内凹设计，线槽垂直对接时，只需剪切两端，即可直接折出出线口，整齐平整，不会割伤电线。 The right angle at the bottom is designed as easily unfolded and internally concave structure, making it easier to cut and unfold for wire exits, and look neat and safe to wires. - 槽底内设线卡安装轨道，当电线量多时，可将电线直接放入线卡内，且线卡可收紧电线，使布线整齐、美观、不占空间。 The floor is with rails, allowing to add traps to tighten wires and make it organized, neat and save space.
颜色种类 Color	RAL7035（白色、蓝色、黑色等可特殊定制） RAL7035 (White, Blue and Black colors are available)
工作温度 Temperature	-40°C ~90°C

开孔细齿型 Fine Tooth Type with Opening

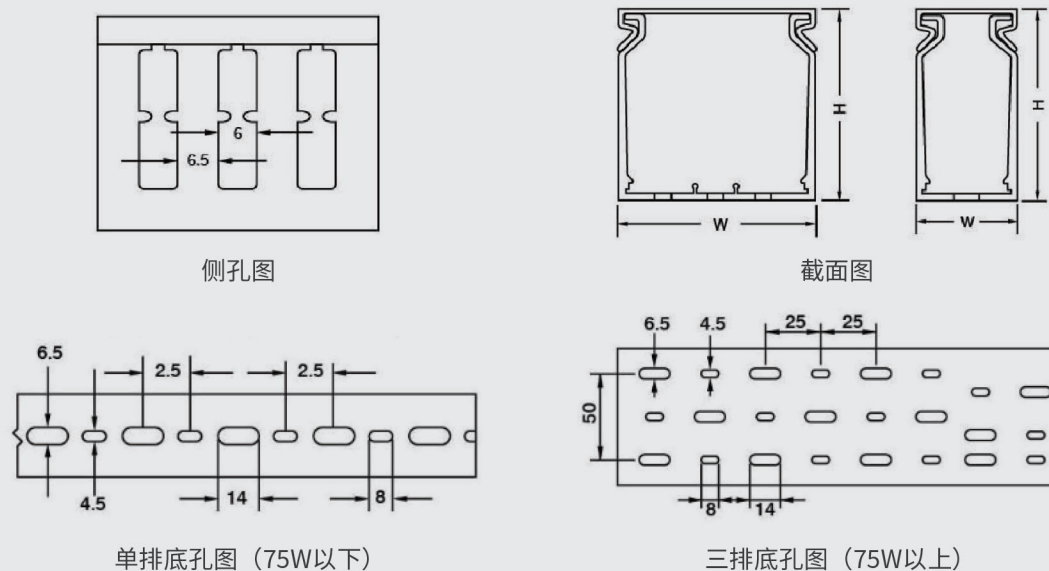


型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VL-VD/R25 25	H25*W25	6	6.5	10-25pcs	2m	100	2122.31101
VL-VD/R37.5 37.5	H37.5*W37.5	6	6.5	60-70pcs	2m	100	2122.31102
VL-VD/R50 25	H50*W25	6	6.5	20-30pcs	2m	100	2122.31201
VL-VD/R50 37.5	H50*W37.5	6	6.5	20-35pcs	2m	80	2122.31202
VL-VD/R50 50	H50*W50	6	6.5	80-90pcs	2m	80	2122.31203
VL-VD/R50 75	H50*W75	6	6.5	180-200pcs	2m	48	2122.31204
VL-VD/R50 100	H50*W100	6	6.5	220-250pcs	2m	48	2122.31205
VL-VD/R75 25	H75*W25	6	6.5	50-55pcs	2m	60	2122.31301
VL-VD/R75 37.5	H75*W37.5	6	6.5	110-115pcs	2m	60	2122.31302
VL-VD/R75 50	H75*W50	6	6.5	180-200pcs	2m	48	2122.31303
VL-VD/R75 75	H75*W75	6	6.5	200-250pcs	2m	36	2122.31304
VL-VD/R75 100	H75*W100	6	6.5	260-320pcs	2m	24	2122.31305

开孔粗齿型 Rough Tooth Profile of Opening

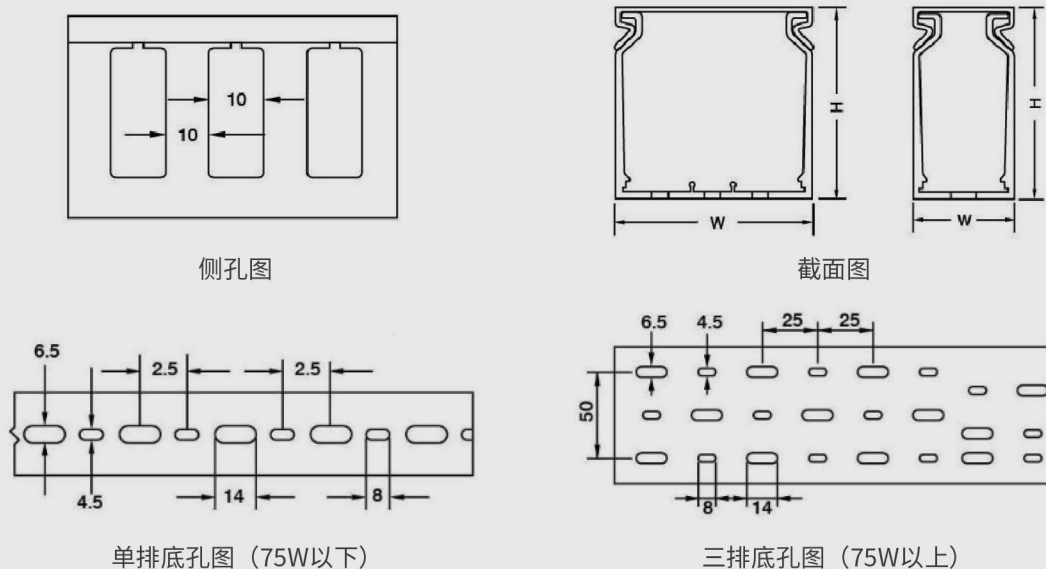

型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VL-UD/R25 25	H25*W25	10	10	10-25pcs	2m	100	2122.32101
VL-UD/R37.5 37.5	H37.5*W37.5	10	10	60-70pcs	2m	100	2122.32102
VL-UD/R50 25	H50*W25	10	10	20-30pcs	2m	100	2122.32201
VL-UD/R50 37.5	H50*W37.5	10	10	20-35pcs	2m	80	2122.32202
VL-UD/R50 50	H50*W50	10	10	80-90pcs	2m	80	2122.32203
VL-UD/R50 75	H50*W75	10	10	180-200pcs	2m	48	2122.32204
VL-UD/R50 100	H50*W100	10	10	220-250pcs	2m	48	2122.32205
VL-UD/R75 25	H75*W25	10	10	50-55pcs	2m	60	2122.32301
VL-UD/R75 37.5	H75*W37.5	10	10	110-115pcs	2m	60	2122.32302
VL-UD/R75 50	H75*W50	10	10	180-200pcs	2m	48	2122.32303
VL-UD/R75 75	H75*W75	10	10	200-250pcs	2m	36	2122.32304
VL-UD/R75 100	H75*W100	10	10	260-320pcs	2m	24	2122.32305

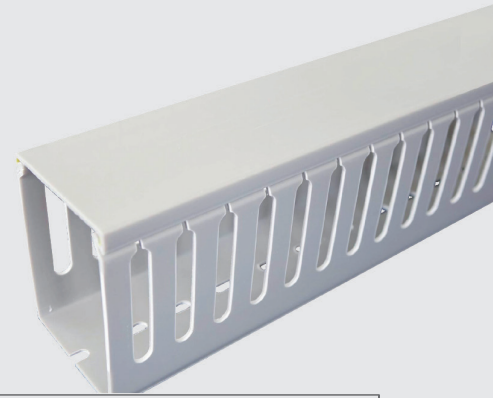


4 防滑阻燃线槽

Anti Skid Flame Retardant Trunking

材质 Material	采用环保硬质 PVC，进口助剂，耐候性、机械性能佳，内部采用弹性高分子防滑材料共挤加工。 Manufactured with High quality rigid PVC, RoHS compliant.
防火等级 Flammability Rating	UL94V-0 阻燃等级，良好自熄性，绝缘特性佳。 UL94 Flammability Rating of V-0, inflaming retarding material with good self extinguishing ability.
产品构造 Construction	1. 盖板内侧共挤防滑条设计，安装便捷，任意角度不脱落。 The inner side of the cover plate of the co-extruded non-slip design, easy to install, does not fall off at any angle. 2. 底孔设计多样化，易于安装，圆形侧孔，适用于电缆布线，截面美观。 Bottom hole to diversify the design, easy to install, circle side hole, suitable for cable wiring, section appearance.
颜色种类 Color	RAL7035（白色、蓝色、黑色等可特殊定制） RAL7035(White, Blue and Black colors are available)
工作温度 Temperature	-20°C ~65°C

开孔细齿型 Fine Tooth Type with Opening

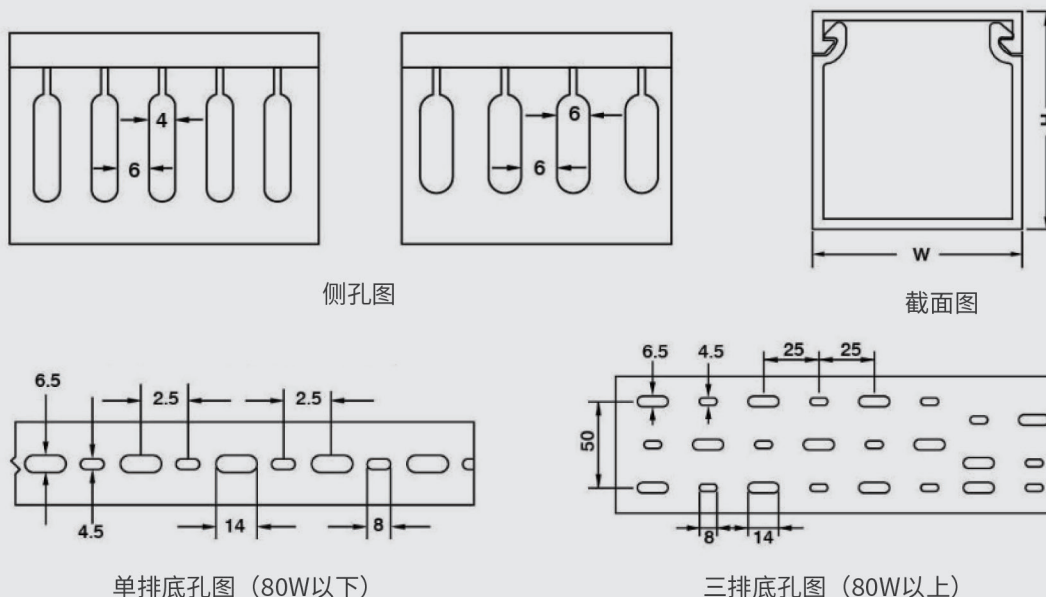


型号 Model	规格 Specifications	孔距（mm） Hole Spacing	齿宽（mm） Tooth Width	电线容量（2m ² ） Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VN-VD20 15	H20*W15	4	6	5-12pcs	2m	200	2122.41101
VN-VD25 25	H25*W25	4	6	10-25pcs	2m	100	2122.41102
VN-VD30 20	H30*W20	4	6	15-25pcs	2m	100	2122.41103
VN-VD30 25	H30*W25	4	6	15-25pcs	2m	100	2122.41104
VN-VD35 35	H35*W35	4	6	35-50pcs	2m	100	2122.41105
VN-VD40 25	H40*W25	4	6	20-25pcs	2m	100	2122.41201
VN-VD40 40	H40*W40	4	6	60-70pcs	2m	100	2122.41202
VN-VD40 60	H40*W60	4	6	100-115pcs	2m	64	2122.41203
VN-VD50 25	H50*W25	4	6	20-25pcs	2m	100	2122.41301
VN-VD50 35	H50*W35	4	6	40-60pcs	2m	100	2122.41302
VN-VD50 45	H50*W45	4	6	70-80pcs	2m	80	2122.41303
VN-VD50 50	H50*W50	4	6	80-90pcs	2m	80	2122.41304
VN-VD50 55	H50*W55	4	6	90-100pcs	2m	64	2122.41305
VN-VD50 60	H50*W60	4	6	100-120pcs	2m	64	2122.41306
VN-VD50 80	H50*W80	4	6	160-180pcs	2m	48	2122.41307

UE-iPart-Trunking

型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VN-VD60 25	H60*W25	4	6	40-45pcs	2m	80	2122.41401
VN-VD60 40	H60*W40	4	6	100-115pcs	2m	64	2122.41402
VN-VD60 50	H60*W50	4	6	100-120pcs	2m	64	2122.41403
VN-VD60 55	H60*W55	4	6	115-125pcs	2m	48	2122.41404
VN-VD60 60	H60*W60	4	6	120-135pcs	2m	48	2122.41405
VN-VD60 80	H60*W80	4	6	180-210pcs	2m	36	2122.41406
VN-VD65 33	H65*W33	4	6	40-75pcs	2m	80	2122.41501
VN-VD65 45	H65*W45	4	6	110-120pcs	2m	80	2122.41502
VN-VD65 65	H65*W65	4	6	180-200pcs	2m	48	2122.41503
VN-VD80 25	H80*W25	4	6	100-120pcs	2m	60	2122.41601
VN-VD80 35	H80*W35	4	6	110-130pcs	2m	60	2122.41602
VN-VD80 40	H80*W40	4	6	140-160pcs	2m	48	2122.41603
VN-VD80 45	H80*W45	4	6	140-165pcs	2m	48	2122.41604
VN-VD80 50	H80*W50	4	6	160-180pcs	2m	48	2122.41605
VN-VD80 60	H80*W60	4	6	180-210pcs	2m	36	2122.41606
VN-VD80 80	H80*W80	4	6	240-290pcs	2m	36	2122.41607
VN-VD80 100	H80*W100	4	6	260-350pcs	2m	24	2122.41608
VN-VD80 120	H80*W120	4	6	280-380pcs	2m	24	2122.41609
VN-VD100 33	H100*W33	6	6	130-165pcs	2m	48	2122.41701
VN-VD100 35	H100*W35	6	6	130-165pcs	2m	48	2122.41702
VN-VD100 40	H100*W40	6	6	130-175pcs	2m	48	2122.41703
VN-VD100 50	H100*W50	6	6	220-250pcs	2m	48	2122.41704
VN-VD100 60	H100*W60	6	6	240-290pcs	2m	36	2122.41705
VN-VD100 80	H80*W120	6	6	260-350pcs	2m	24	2122.41706
VN-VD100 100	H100*W100	6	6	300-400pcs	2m	24	2122.41707
VN-VD100 120	H100*W120	6	6	380-480pcs	2m	24	2122.41708
VN-VD100 140	H100*W140	6	6	430-620pcs	2m	24	2122.41709

开孔粗齿型 Tooth Profile of Opening

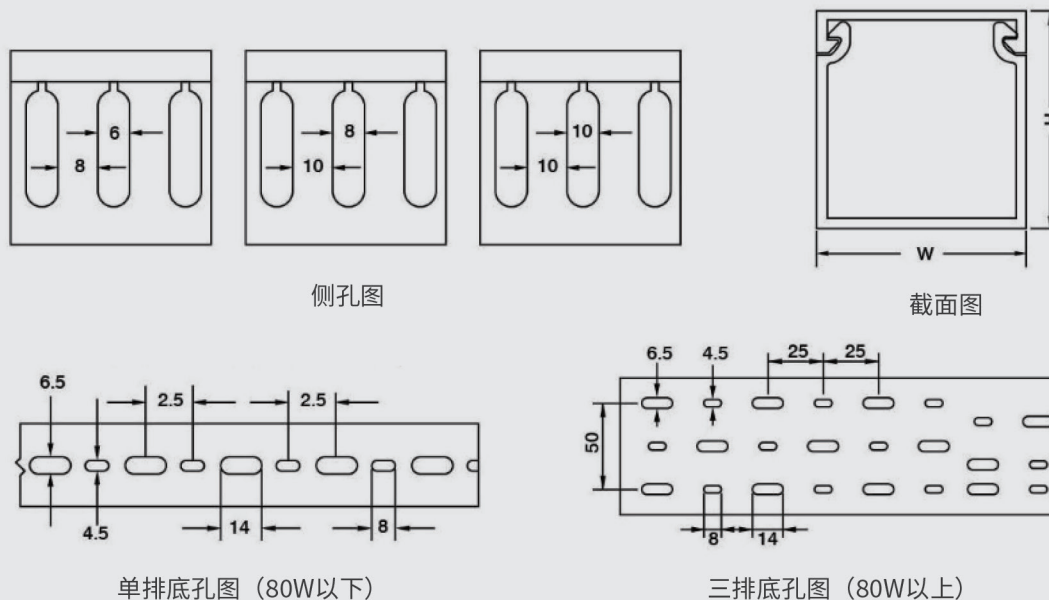


型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VN-UD40 25	H40*W25	6	8	20-25pcs	2m	100	2122.42101
VN-UD40 40	H40*W40	6	8	60-70pcs	2m	100	2122.42102
VN-UD40 60	H40*W60	6	8	100-115pcs	2m	64	2122.42103
VN-UD45 33	H45*W33	6	8	40-55pcs	2m	100	2122.42201
VN-UD45 45	H45*W45	6	8	60-70pcs	2m	80	2122.42202
VN-UD50 25	H50*W25	6	8	20-25pcs	2m	100	2122.42301
VN-UD50 35	H50*W35	6	8	40-60pcs	2m	100	2122.42302
VN-UD50 45	H50*W45	6	8	70-80pcs	2m	80	2122.42303
VN-UD50 50	H50*W50	6	8	80-90pcs	2m	80	2122.42304
VN-UD50 55	H50*W55	6	8	90-100pcs	2m	48	2122.42305
VN-UD50 60	H50*W60	6	8	100-120pcs	2m	48	2122.42306
VN-UD50 80	H50*W80	6	8	160-180pcs	2m	48	2122.42307

UE-iPart-Trunking

型号 Model	规格 Specifications	孔距 (mm) Hole Spacing	齿宽 (mm) Tooth Width	电线容量 (2m ²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VN-UD60 25	H60*W25	8	10	40-45pcs	2m	80	2122.42401
VN-UD60 40	H60*W40	8	10	100-115pcs	2m	64	2122.42402
VN-UD60 50	H60*W50	8	10	100-120pcs	2m	48	2122.42403
VN-UD60 55	H60*W55	8	10	115-125pcs	2m	48	2122.42404
VN-UD60 60	H60*W60	8	10	120-135pcs	2m	48	2122.42405
VN-UD60 80	H60*W80	8	10	180-210pcs	2m	36	2122.42406
VN-UD65 33	H65*W33	8	10	40-75pcs	2m	80	2122.42501
VN-UD65 45	H65*W45	8	10	110-120pcs	2m	80	2122.42502
VN-UD65 65	H65*W65	8	10	180-200pcs	2m	48	2122.42503
VN-UD80 25	H80*W25	8	10	100-120pcs	2m	60	2122.42601
VN-UD80 35	H80*W35	8	10	110-130pcs	2m	60	2122.42602
VN-UD80 40	H80*W40	8	10	140-160pcs	2m	48	2122.42603
VN-UD80 45	H80*W45	8	10	140-165pcs	2m	48	2122.42604
VN-UD80 50	H80*W50	8	10	160-180pcs	2m	48	2122.42605
VN-UD80 60	H80*W60	8	10	180-210pcs	2m	36	2122.42606
VN-UD80 80	H80*W80	8	10	240-290pcs	2m	36	2122.42607
VN-UD80 100	H80*W100	8	10	260-350pcs	2m	24	2122.42608
VN-UD80 120	H80*W120	8	10	280-380pcs	2m	24	2122.42609
VN-UD100 33	H100*W33	10	10	130-165pcs	2m	48	2122.42701
VN-UD100 35	H100*W35	10	10	130-165pcs	2m	48	2122.42702
VN-UD100 40	H100*W40	10	10	130-175pcs	2m	48	2122.42703
VN-UD100 50	H100*W50	10	10	220-250pcs	2m	48	2122.42704
VN-UD100 60	H100*W60	10	10	240-290pcs	2m	36	2122.42705
VN-UD100 80	H80*W120	10	10	260-350pcs	2m	24	2122.42706
VN-UD100 100	H100*W100	10	10	300-400pcs	2m	24	2122.42707
VN-UD100 120	H100*W120	10	10	380-480pcs	2m	24	2122.42708
VN-UD100 140	H100*W140	10	10	430-620pcs	2m	16	2122.42709
VN-UD130 100	H130*W100	10	10	420-600pcs	2m	16	2122.42901
VN-UD140 35	H140*W35	10	10	120-165pcs	2m	24	2122.42902
VN-UD150 100	H150*W100	10	10	450-650pcs	2m	16	2122.42903

全封闭型 Totally Enclosed

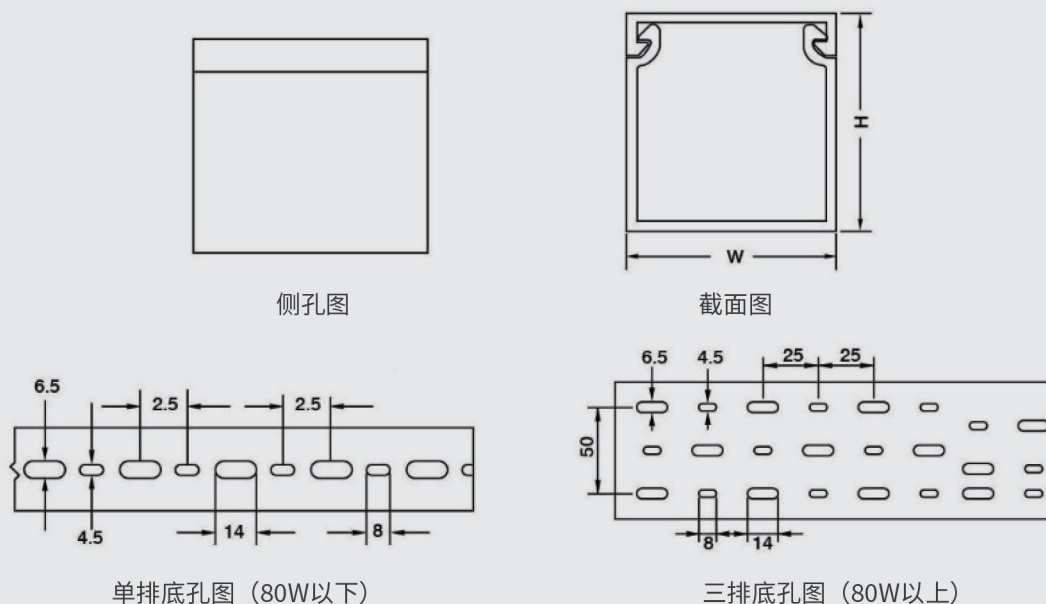

型号 Model	规格 Specifications	电线容量 (2m ²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VN-MD40 25	H40*W25	20-25pcs	2m	100	2122.43101
VN-MD40 40	H40*W40	60-70pcs	2m	100	2122.43102
VN-MD40 60	H40*W60	100-115pcs	2m	64	2122.43103
VN-MD45 33	H45*W33	40-55pcs	2m	100	2122.43201
VN-MD45 45	H45*W45	60-70pcs	2m	80	2122.43202
VN-MD50 25	H50*W25	20-25pcs	2m	100	2122.43301
VN-MD50 35	H50*W35	40-60pcs	2m	100	2122.43302
VN-MD50 45	H50*W45	70-80pcs	2m	80	2122.43303
VN-MD50 50	H50*W50	80-90pcs	2m	80	2122.43304
VN-MD50 55	H50*W55	90-100pcs	2m	48	2122.43305
VN-MD50 60	H50*W60	100-120pcs	2m	48	2122.43306
VN-MD50 80	H50*W80	160-180pcs	2m	48	2122.43307
VN-MD60 25	H60*W25	40-45pcs	2m	80	2122.43401
VN-MD60 40	H60*W40	100-115pcs	2m	64	2122.43402

UE-iPart-Trunking

型号 Model	规格 Specifications	电线容量 (2m²) Wire Capacity	标准长度 Standard Length	包装 Package	订货号 Order No.
VN-MD60 50	H60*W50	100-120pcs	2m	48	2122.43403
VN-MD60 55	H60*W55	115-125pcs	2m	48	2122.43404
VN-MD60 60	H60*W60	120-135pcs	2m	48	2122.43405
VN-MD60 80	H60*W80	180-210pcs	2m	36	2122.43406
VN-MD65 33	H65*W33	40-75pcs	2m	80	2122.43501
VN-MD65 45	H65*W45	110-120pcs	2m	80	2122.43502
VN-MD65 65	H65*W65	180-200pcs	2m	48	2122.43503
VN-MD80 25	H80*W25	100-120pcs	2m	60	2122.43601
VN-MD80 35	H80*W35	110-130pcs	2m	60	2122.43602
VN-MD80 40	H80*W40	140-160pcs	2m	48	2122.43603
VN-MD80 45	H80*W45	140-165pcs	2m	48	2122.43604
VN-MD80 50	H80*W50	160-180pcs	2m	48	2122.43605
VN-MD80 60	H80*W60	180-210pcs	2m	36	2122.43606
VN-MD80 80	H80*W80	240-290pcs	2m	36	2122.43607
VN-MD80 100	H80*W100	260-350pcs	2m	24	2122.43608
VN-MD80 120	H80*W120	280-380pcs	2m	24	2122.43609
VN-MD100 33	H100*W33	130-165pcs	2m	48	2122.43701
VN-MD100 35	H100*W35	130-165pcs	2m	48	2122.43702
VN-MD100 40	H100*W40	130-175pcs	2m	48	2122.43703
VN-MD100 50	H100*W50	220-250pcs	2m	48	2122.43704
VN-MD100 60	H100*W60	240-290pcs	2m	36	2122.43705
VN-MD100 80	H80*W120	260-350pcs	2m	24	2122.43706
VN-MD100 100	H100*W100	300-400pcs	2m	24	2122.43707
VN-MD100 120	H100*W120	380-480pcs	2m	24	2122.43708
VN-MD100 140	H100*W140	430-620pcs	2m	16	2122.43709
VN-MD120 75	H120*W75	280-380pcs	2m	24	2122.43901
VN-MD130 100	H130*W100	420-600pcs	2m	16	2122.43902
VN-MD140 35	H140*W35	120-165pcs	2m	24	2122.43903
VN-MD150 100	H150*W100	450-650pcs	2m	16	2122.43904

UE-iPart-Trunking

Product Introduction

Vaule Plus,
Professional Choice for Each Engineer!

Wuxi Vaule Plus Electric Power Technology Co.,Ltd.
South side of shuofanlihe road and west side of sun'an highway, Xinwu District, Wuxi City
Email sale@vauleplus.com

